



V1.1

--
--
--

KE-GT(80-110)KTL4





1		6
2		10
3		16
4		24
5		25
6		29
7		31
8		32

1

1.1

▪

▪

▪

▪

▪

▪

▪

▪

▪

▪


▪

▪

▪

-
-
-

1.2

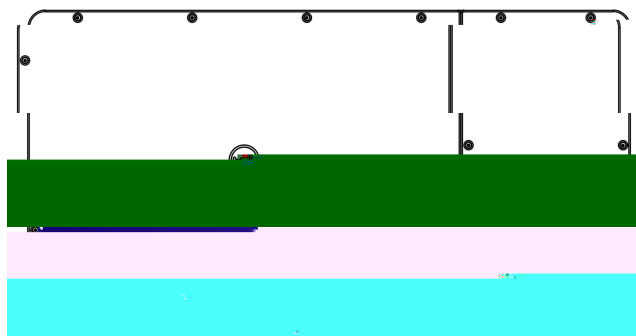

1.3



[illegible]

[illegible]

2

2.1









2.2






2.3


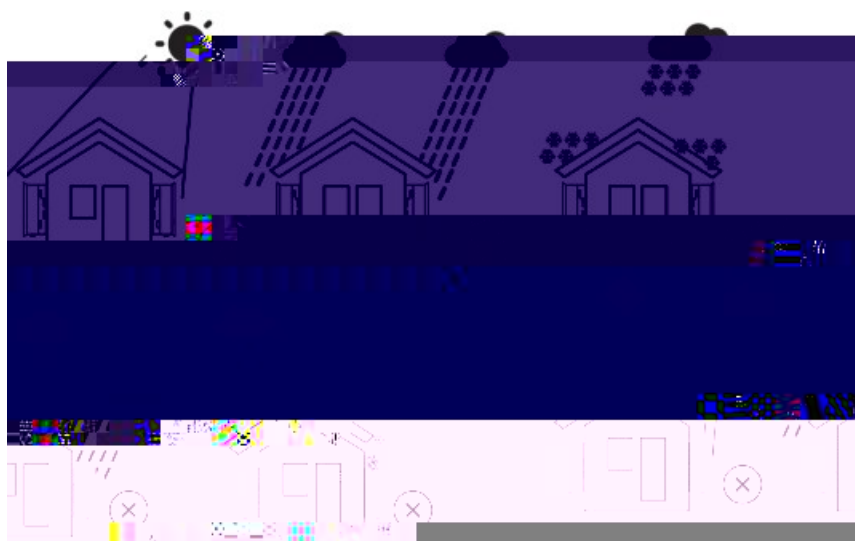


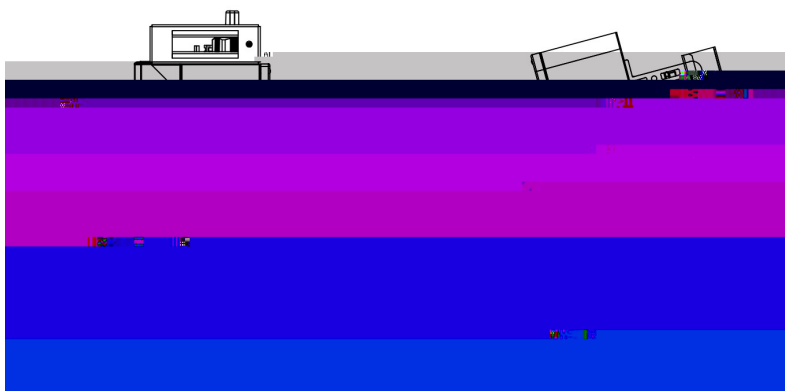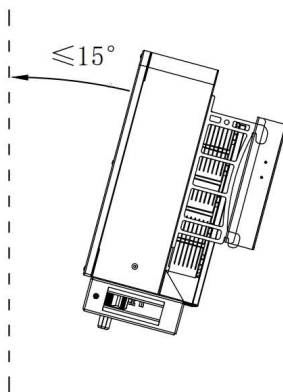



2.4

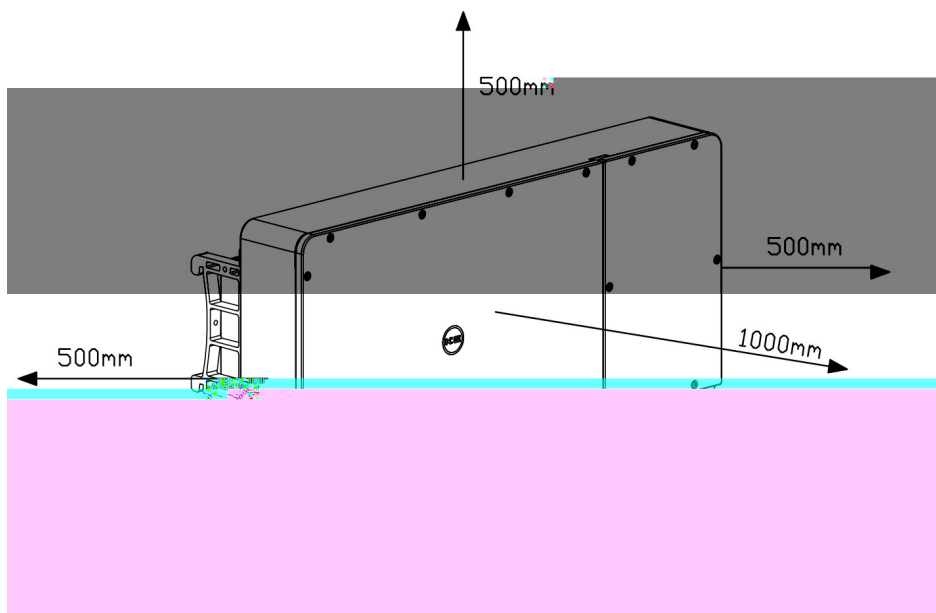

2.5

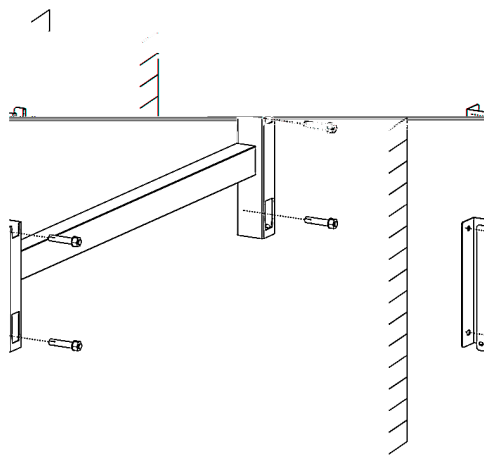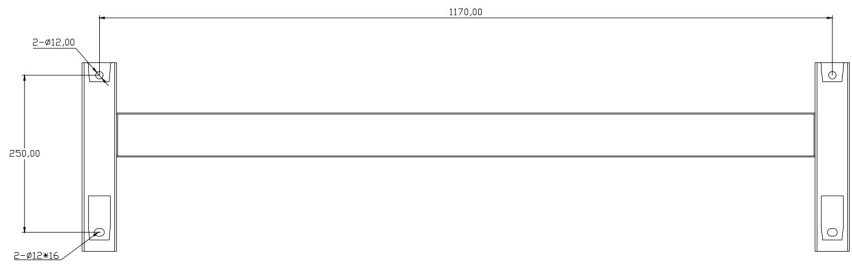

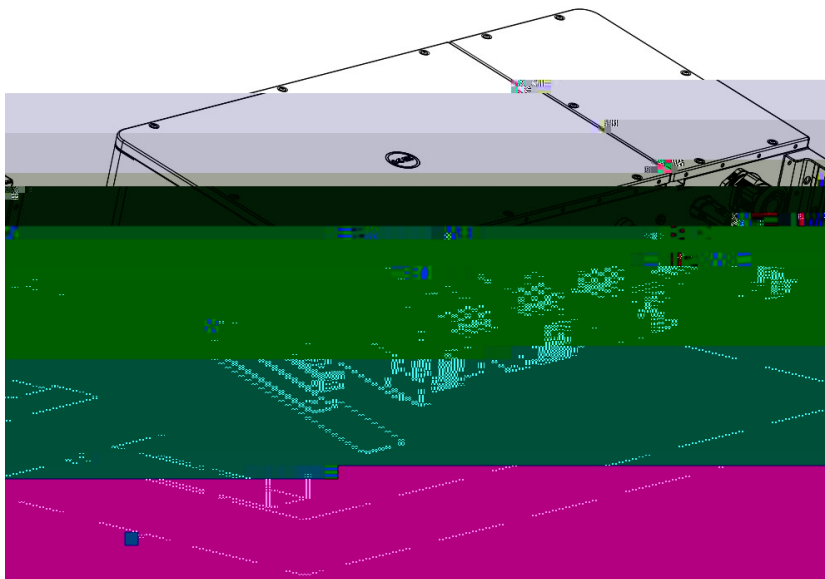
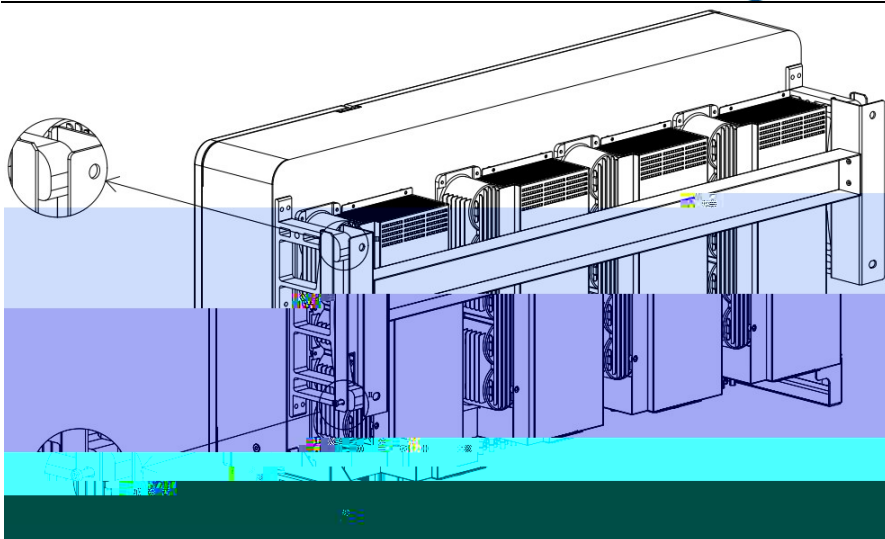





3


3.1

3.2

- ④
- ⑤
- ⑥
- ⑦
- ⑧

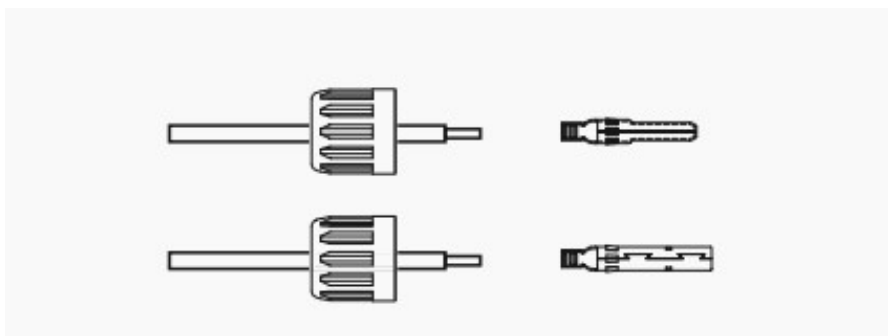
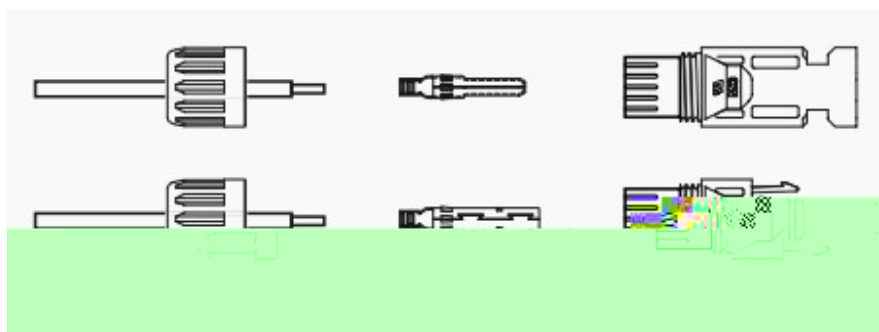


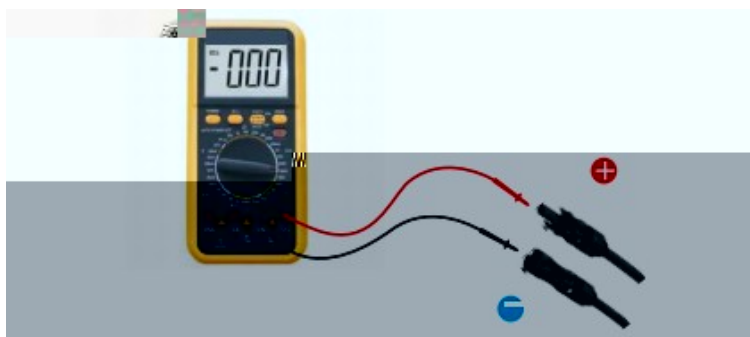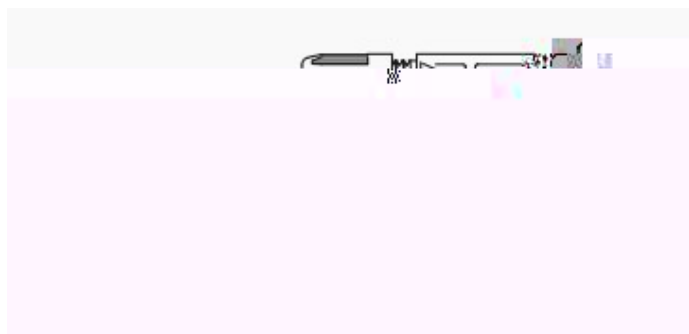
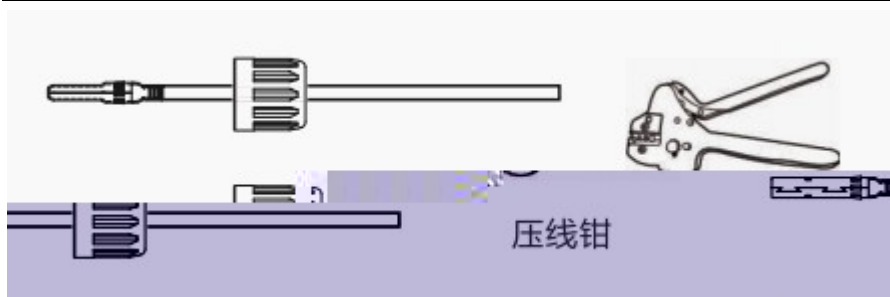


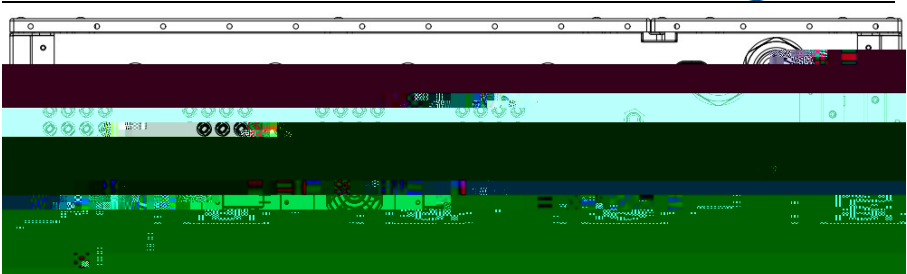

3.3



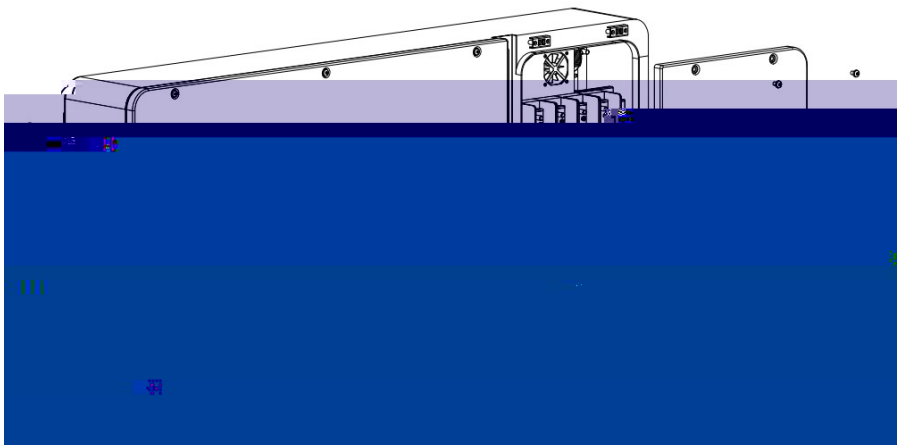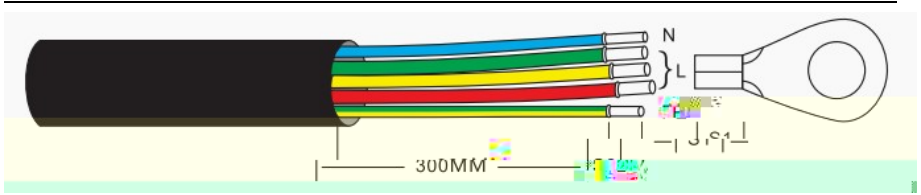

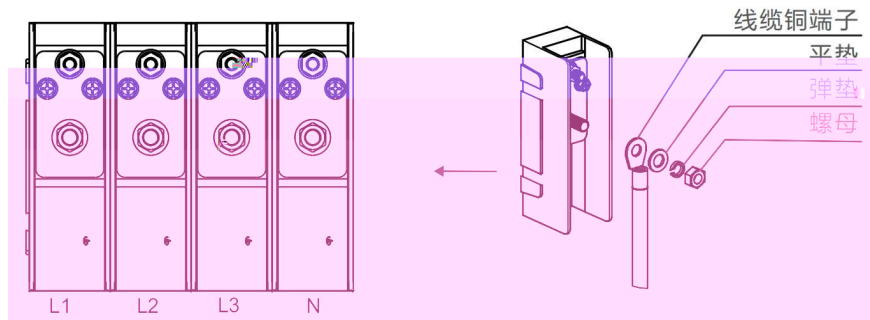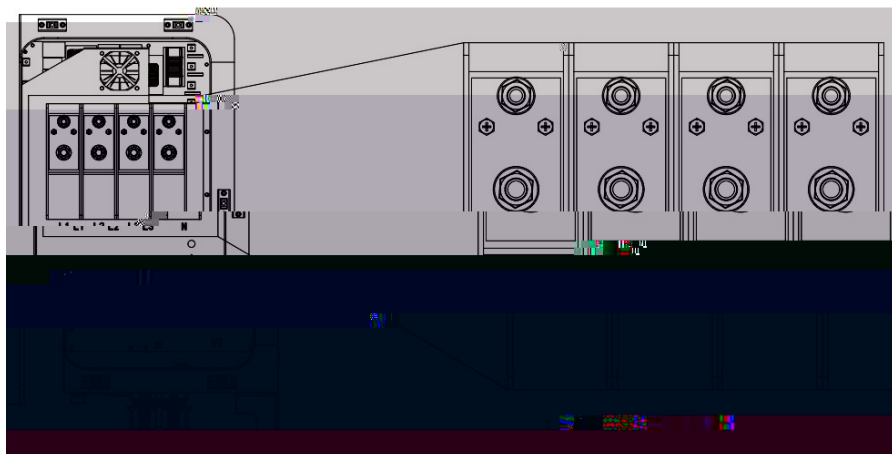


3.4



重要:

对于并联的多个逆变器，所有逆变器应连接到同一接地点，以确保接地线等电位连接。

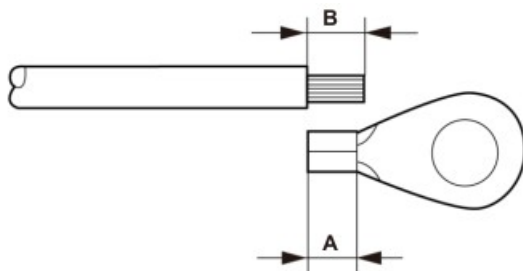


重要:

A (OT线缆端子压接区域) 长2mm~3mm。



重要:


P (OT线缆剥高长度) 长2mm~3mm。

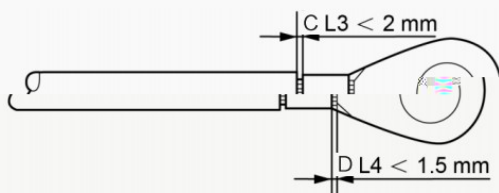



重要:

将端子压接到线缆后，检查连接以确保端子牢固地压接到线缆上。

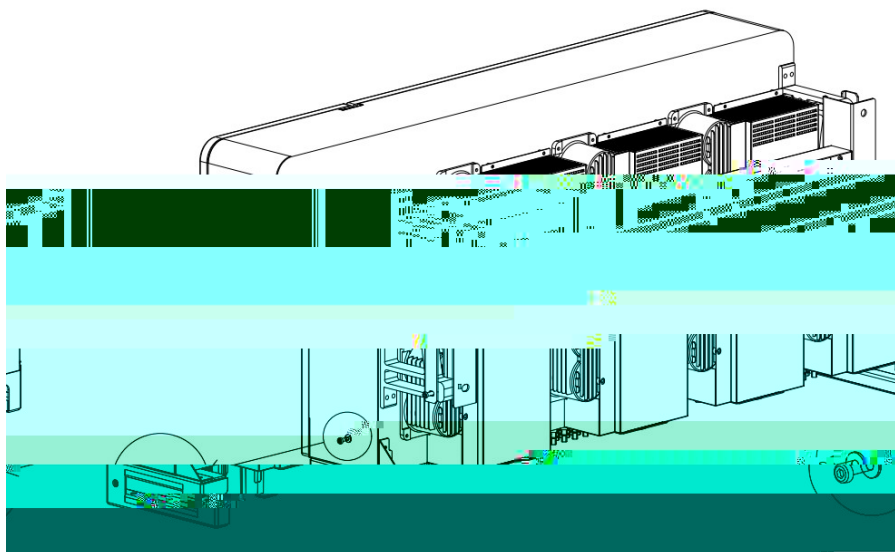

重要:

为提升防腐性能，安装接地线后，建议涂上硅胶或涂料。

4

4.1

4.2

5

5.1







5.2

智慧光伏监控运维系统



[illegible]

7



