




V1.2

--
--
--

KE-GT(30-40)KTL4

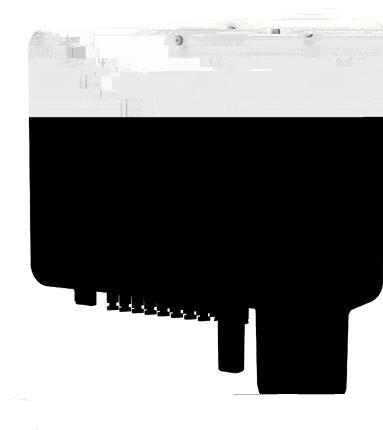




1		6
2		10
3		16
4		24
5		25
6		29
7		32
8		33

1


1.1

-
-
-
-
-
-
-
-
-
-
-
-

1.2

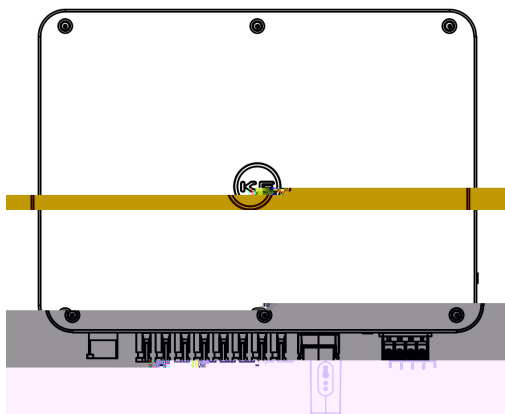

1.3

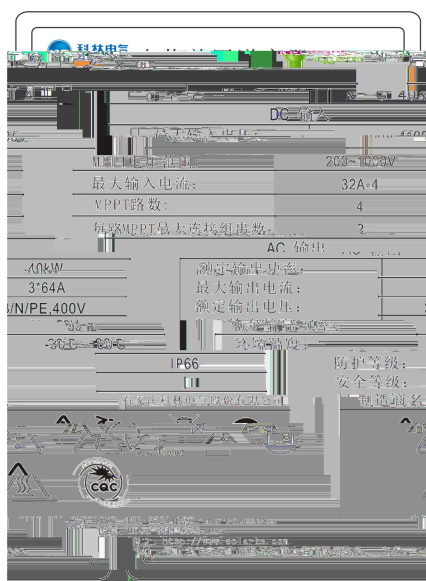

1.4

[illegible]

	7	
	92 22	
	2 722	
	25	
	0222 4222	
	D	
	R041 4	
	0	
	R2224 4270	94220 4274

2

2.1







2.2






2.3



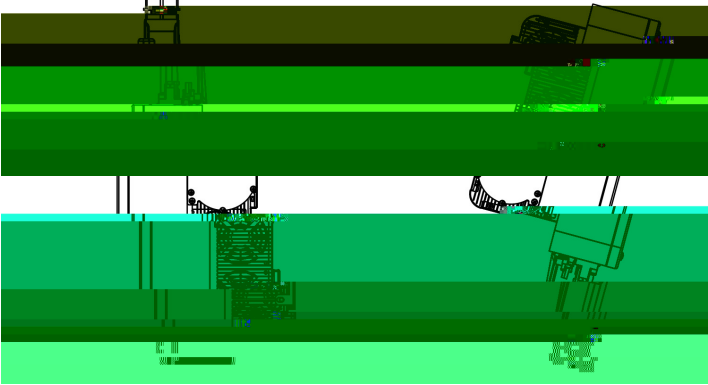
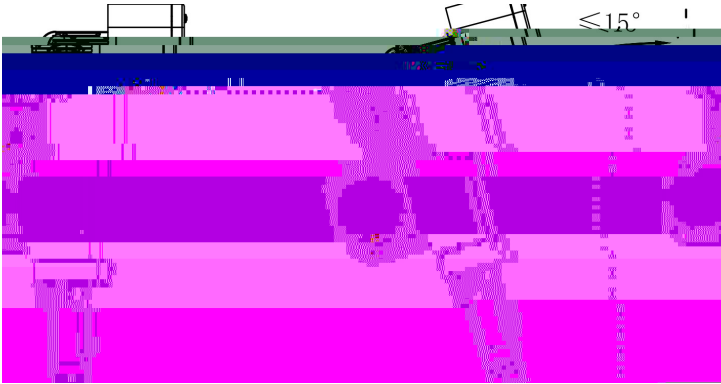





2.4

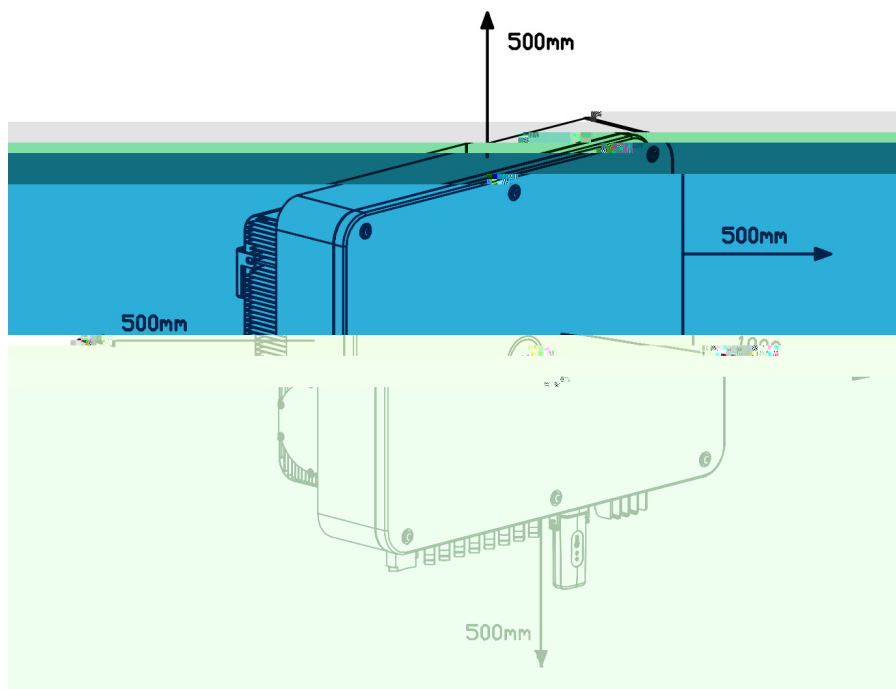



2.5


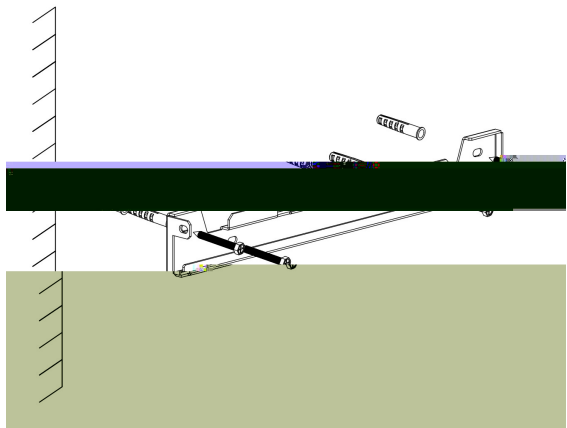
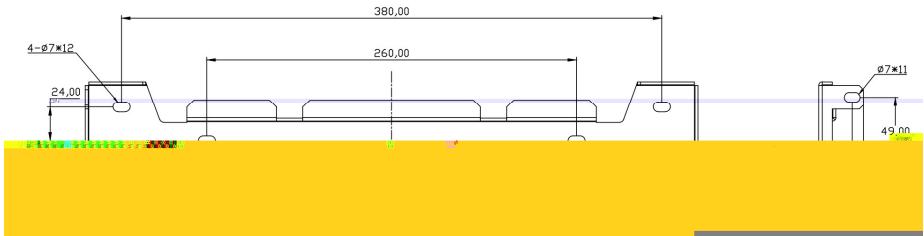


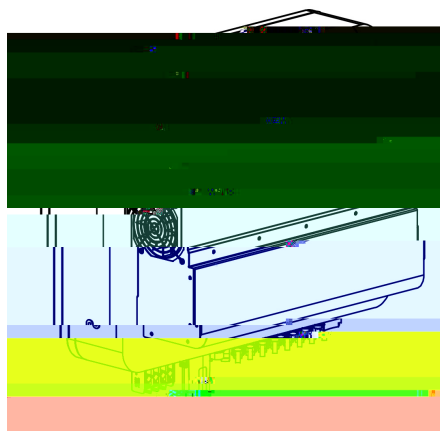


3

3.1


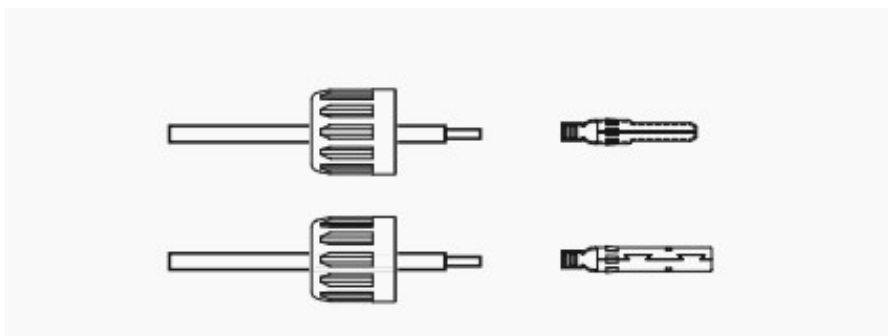
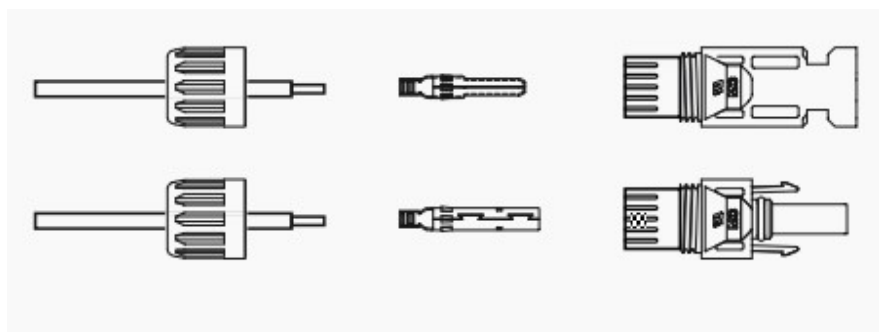


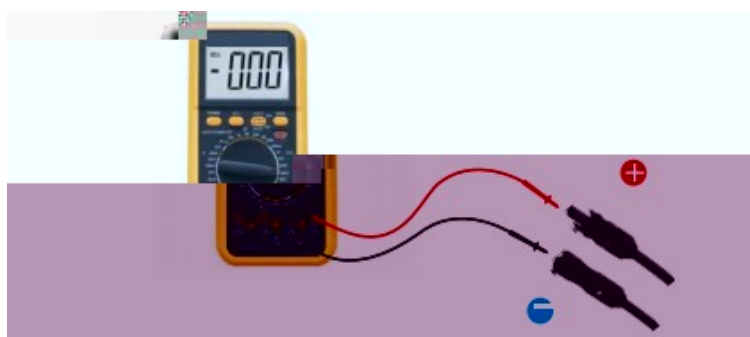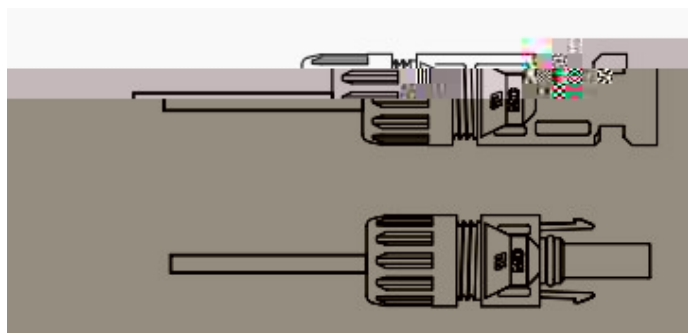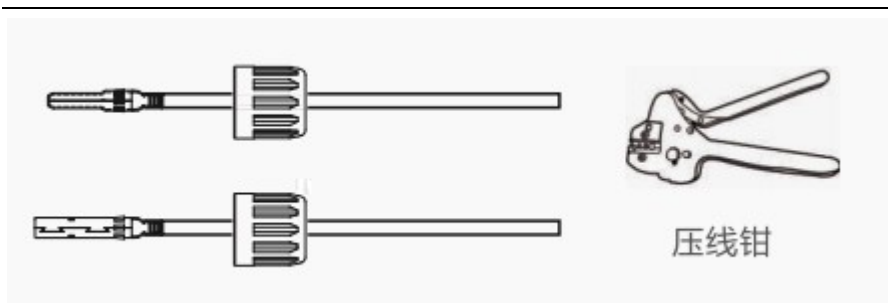

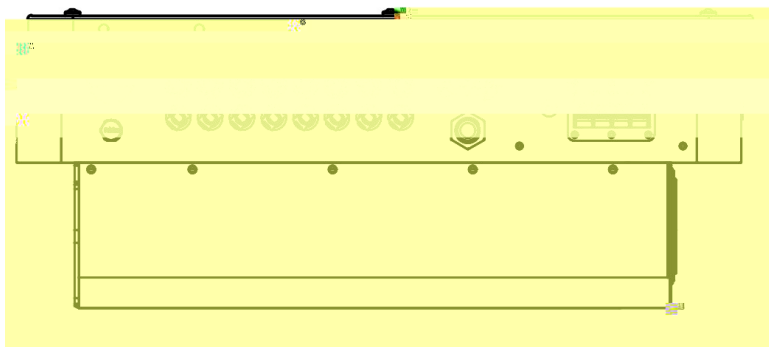


3.3




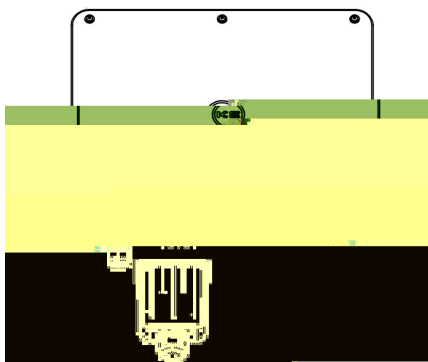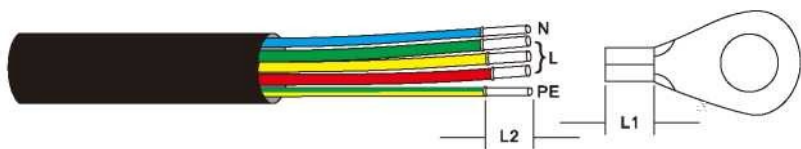

4~6Nm

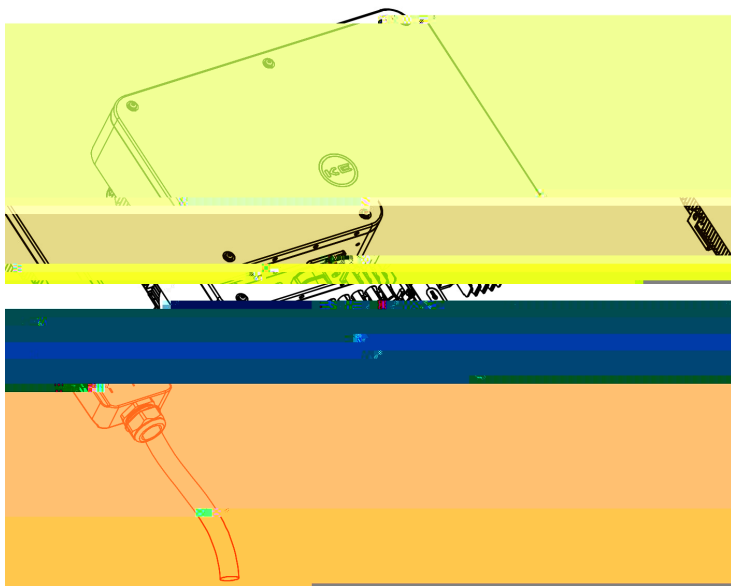

3.4 RS485

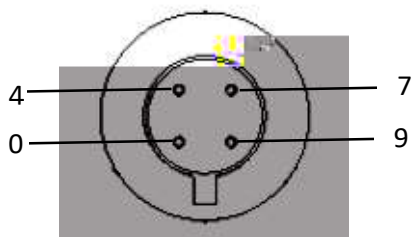


3.5




重要:

对于并联的多个逆变器，所有逆变器应连接到同一接地点，以确保接地线等电位连接。

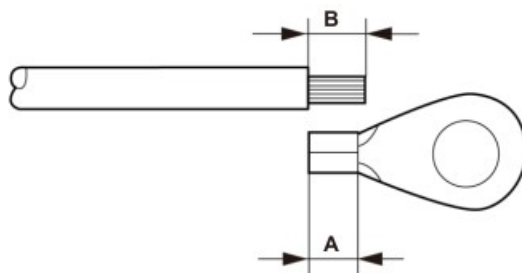


重要:

P (导线剥皮长度) 比A (OT线缆端子压接区域) 长2mm~3mm。

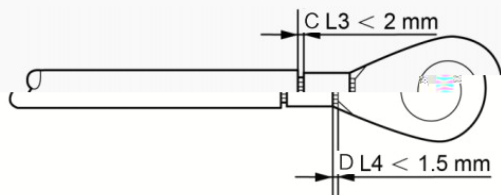

重要:

将端子压接到电缆上，检查连接以确保端子牢固地压到电缆上。

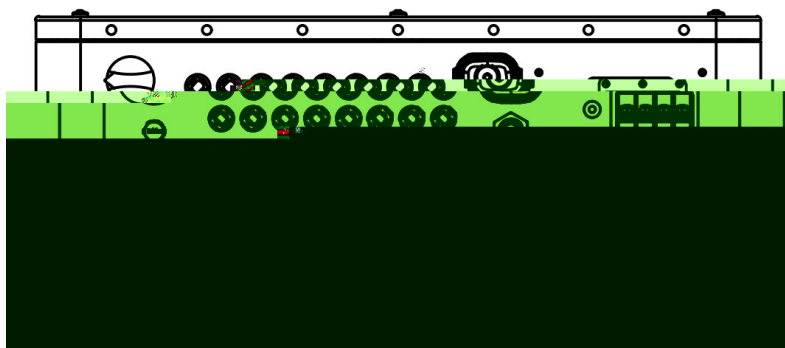

重要:

为进一步提高防腐性能，安装接地线后，建议涂上硅胶或涂料。


4

4.1


4.2

5

5.1

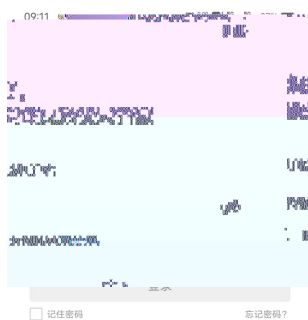



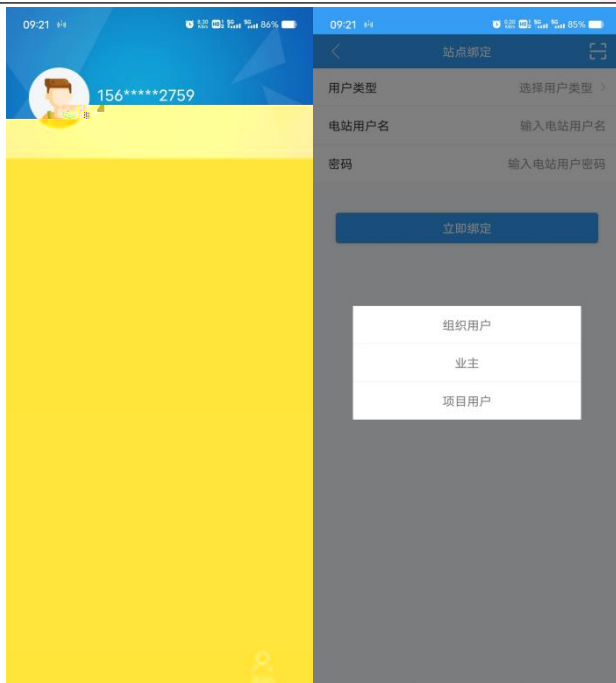

5.2

6

	7 4 9
	7 4
	7 4
	7 4 9
	7 4 9
	7 4 9 0

	7 4 9
	7 4
	7 4
	7 4
	7 4 9
	7 4
	7 4
	7 4
	7 4
	7 4

	7	
	4	



